

Cal. 5R66, 5R67

INSTRUCTIONS	(P. 3)
BEDIENUNGSANLEITUNG	(S. 33)
INSTRUCTIONS	(P. 63)
ISTRUZIONI	(P. 93)
INSTRUCCIONES	(P. 127)
INSTRUÇÕES	(P. 157)
用法説明	(187 頁)

You are now the proud owner of a Spring Drive Watch. For the best results, please read the instructions in this booklet carefully before using your Spring Drive Watch. Please keep this manual handy for ready reference.

Sie sind jetzt stolzer Besitzer einer „Spring Drive“-Uhr. Lesen Sie diese Bedienungsanleitung vor der Verwendung Ihrer „Spring Drive“-Uhr aufmerksam durch, um ihre optimale Nutzung zu gewährleisten. Heben Sie diese Bedienungsanleitung gut auf, um jederzeit wieder nachlesen zu können.

Vous êtes maintenant l'heureux propriétaire d'une Montre Spring Drive. Pour en obtenir les meilleurs résultats, veuillez lire attentivement les instructions de cette brochure avant d'utiliser votre Montre Spring Drive. Veuillez conserver ce manuel à portée de la main pour pouvoir vous y référer facilement.

Congratulazioni per l'acquisto di questo nuovo orologio con trascinamento a molla ("Spring Drive"). Per ottenere i massimi risultati dall'orologio leggere attentamente questo manuale di istruzioni prima di passare all'uso dell'orologio stesso, e conservarlo poi per qualsiasi eventuale futura consultazione.

Usted es ahora un orgulloso propietario de un Reloj Spring Drive. Para los mejores resultados, por favor, lea cuidadosamente las instrucciones de este panfleto antes de utilizar este Reloj Spring Drive. Le rogamos guardar este manual a mano para futura referencia.

Você pode agora sentir-se orgulhoso de possuir um Relógio Spring Drive. Para obter os melhores resultados, leia atentamente as instruções contidas neste opúsculo antes de usar o relógio. Conserve este manual para consultas futuras.

歡迎你購買 發條驅動手錶。為能有效的利用，請在使用發條驅動手錶之前，仔細閱讀本手冊內的各項說明，並妥善保管以備今後參考。

CONTENTS

	Page
FEATURES	4
NAMES OF THE PARTS	5
HOW TO USE	7
HOW TO READ THE POWER RESERVE INDICATOR	22
TO PRESERVE THE QUALITY OF YOUR WATCH	24
PLACES TO KEEP YOUR WATCH	28
PERIODIC CHECKS	29
TROUBLESHOOTING.	30
SPECIFICATIONS	32

FEATURES

Spring Drive, the unique mechanism made available only by SEIKO technology, ensures high accuracy while using the mainspring as its sole power source.

The watch will work continuously for approximately 72 hours (three days) when the mainspring is fully wound. The watch features a power reserve indicator to show the winding state of the mainspring. The glide-motion second hand works in a perfectly smooth movement.

This is an automatic watch equipped with a manual winding mechanism. When first using the watch, manual winding is convenient.


Caliber 5R66, which is equipped with a 24-hour hand, features an hour-hand independent adjustment function (for time difference adjustment), offering several types of 24-hour hand usage. For instance, if you set the 24-hour hand to show your home time, you can independently set the hour hand to display the time of the place you are staying at as well as easily check your home time by the 24-hour hand. Alternatively, you can set the 24-hour hand to display the time in a different time zone. Caliber 5R67 features a moon phase display function.



CAUTION

- This watch is powered by the mainspring. To ensure constant operation of the watch, be sure to wind up the mainspring sufficiently before the power reserve indicator points to "0."
- The watch may stop if the power reserve indicator is showing less than one-sixth of the power reserve, especially if it is left at a temperature below 0°C.


NAMES OF THE PARTS

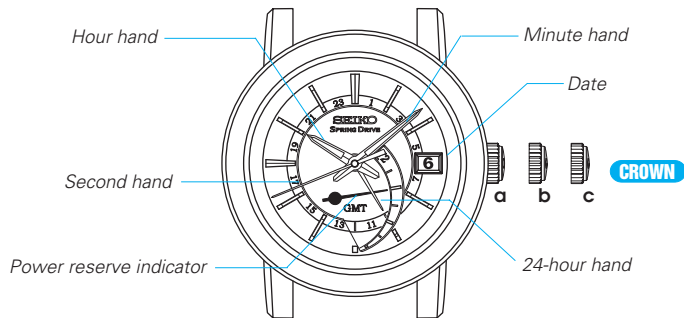

CROWN

- | | |
|--------------------------|--|
| a) Normal position | : winding up the mainspring (manual operation) |
| b) First click position | : hour-hand independent adjustment, date setting |
| c) Second click position | : time setting |

[Caliber 5R66]

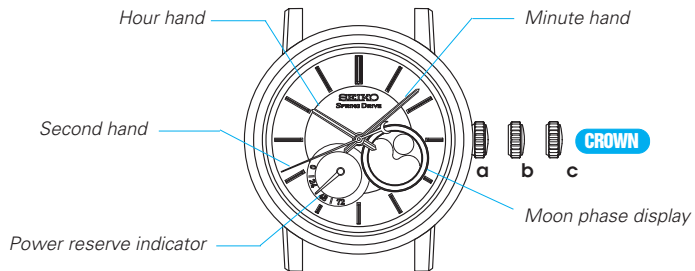

CROWN

- a) Normal position : winding up the mainspring (manual operation)
 b) First click position : moon phase setting
 c) Second click position : time settings

[Caliber 5R67]


HOW TO USE

This watch is an automatic watch equipped with a manual winding mechanism.

- When the watch is worn on the wrist, the motion of the wearer's arm winds the mainspring of the watch.
- If your watch is completely stopped, it is recommended that you manually wind the mainspring by turning the crown.


● How to manually wind the mainspring by turning the crown (for Cal. 5R66 & 5R67)

1. Slowly turn the crown clockwise (the 12 o'clock direction) to wind the mainspring.



- * With manual winding, if you give the crown five full rotations, it provides the power to run the watch for approximately ten hours.
- * Turning the crown counterclockwise (the 6 o'clock direction) does not wind the mainspring.

2. Wind the mainspring until the power reserve indicator shows a fully-wound state. The second hand will start moving.



- * To check the winding state of the mainspring, refer to "HOW TO READ THE POWER RESERVE INDICATOR" on page 22.
- * There is no need to turn the crown further when the mainspring is fully wound. But the crown can be turned without damaging the watch mechanism.

→ To move on to time setting, follow the instructions pertaining to the caliber number of your watch.

Caliber 5R66 .. Refer to “● How to set the time and date, how to use the time difference adjustment function (for Cal. 5R66)” at the bottom of this page.

Caliber 5R67 .. Refer to “● How to set the time and moon phase (for Cal. 5R67)” on page 19.


● How to set the time and date, how to use the time difference adjustment function (for Cal. 5R66)

● How to set the time

- When setting the time, ensure that the watch is working: the main spring is sufficiently wound.
- The 24-hour hand can be used in two ways. Since the time setting method differs according to the usage, please choose the mode before setting the time.


<Mode 1> Simply using the 24-hour hand to show the 24-hour time as an AM/PM indicator.

- This is the standard usage type for the 24-hour hand.




<Mode 2> Using the 24-hour hand to indicate the time in a different time zone.

- For instance, by setting the 24-hour hand to GMT while setting the hour and minute hands to indicate the time in your area, you can easily check GMT with the 24-hour hand at any time.




How to set the 24-hour hand as a regular 24-hour indicator <When the mode 1 usage is selected>



Second click position

1. Pull out the crown to the second click.

- * Pull the crown out when the second hand is at the 12 o'clock position and the second hand will stop on the spot.
- * When setting the time, ensure that the watch is working: the mainspring is sufficiently wound.



<Example>

To set to 10:00 A.M., adjust the 24-hour hand to indicate "10" on the 24-hour scale (5 o'clock position), and the minute hand to the "0" minute position.

To set to 6:00 P.M., adjust the 24-hour hand to indicate "18" on the 24-hour scale (9 o'clock position), and the minute hand to the "0" minute position.

- Turn the crown counterclockwise to set the 24-hour and minute hands to the current time.

- * Only the 24-hour and minute hands are to be set at this stage. The hour hand is to be set later so it is not necessary to adjust the hour hand yet, even if it is indicating the wrong time.
- * The date may be altered depending on the position of the hour hand, however it should not cause any concern since it can also be adjusted later.
- * Set the minute hand slightly behind the time you wish to set, and then slowly advance it to the desired time.

- Push the crown back in simultaneously with the time signal.

- * The setting of the 24-hour, minute and second hands to the current time is now completed.

- Pull out the crown to the first click.




- Turn the crown to set the hour hand to the current hour.

- * Also, adjust the date at this point if necessary.
- * The moment the date changes is midnight. When setting the hour hand, be sure that AM/PM is set correctly.
- * Turn the crown slowly, checking that the hour hand moves in one-hour increments.
- * When adjusting the hour hand, the other hands may move slightly. However, this is not a malfunction.

- Push the crown back in upon completion of time setting.


How to set the 24-hour hand as a dual time indicator for a "different time zone area" <when the mode 2 usage is selected>



Second click position

- Pull out the crown to the second click.

- * Pull the crown out when the second hand is at the 12 o'clock position and the second hand will stop on the spot.
- * When setting the time, ensure that the watch is working: the mainspring is sufficiently wound.



<Example>

To set the 24-hour hand to the time in New York while setting the hour/minute hands to indicate the time in London.

When the time in London is 10:00 A.M., it is 5:00 A.M. in New York. Set the 24-hour hand to indicate "5" on the 24-hour scale (the 2.5 o'clock position), while the minute hand is pointing at the "0" minute position.

* The time difference adjustment function serves only for a time in a "different time zone area" where the time difference from the time in London is represented in one-hour increments.


- Turn the crown counterclockwise to set the 24-hour and minute hands to the time in the "different time zone area" you wish to set.

- * Only the 24-hour and minute hands are to be set at this stage. The hour hand is to be set later so it is not necessary to adjust the hour hand yet, even if it is indicating the wrong time.
- * The date may be altered depending on the position of the hour hand, however it should not cause any concern since it can also be adjusted later.
- * Set the minute hand behind the time and then slowly advance it to the desired time.

- Push the crown back in simultaneously with the time signal.

- * The setting of the 24-hour, minute and second hands to the time in the "different time zone area" is now completed.

- Pull out the crown to the first click.



- Turn the crown to set the hour hand to the current hour. (In this example, the current hour in London.)

- * Also, adjust the date at this point if necessary.
- * The moment the date changes is midnight. When setting the hour hand, be sure that AM/PM is set correctly.
- * Turn the crown slowly, checking that the hour hand moves in one-hour increments.
- * When adjusting the hour hand, the other hands may move slightly. However, this is not a malfunction.


- Push the crown back in upon completion of time setting.

Tips for more accurate time setting

- Keep in mind the following points in order to set the time more accurately.
- Before setting the time, wind the mainspring sufficiently until the power reserve indicator shows the fully-wound state.
 - When starting to use a watch after it stops, wind the mainspring sufficiently and wait approximately 30 seconds after the second hand starts to move, then pull the crown out to the second click.
 - Do not stop the second hand movement for 30 minutes or longer while the crown is at the second click position. If the stoppage of the second hand movement exceeds 30 minutes, push the crown back in to restart the second hand, wait at least 30 seconds, and then carry out the time setting once again.

● How to set the date

- This watch is designed so that the date changes one day by turning the hour hand two full rotations in the same way as “the time difference adjustment function”.
 - The date advances one day by turning the hour hand two full rotations clockwise, while the date is set back one day by turning the hour hand two full rotations counterclockwise.
 - After setting the time, it is necessary to set the date. Manual date adjustment is required on the first day after a month that has less than 31 days.
1. Pull out the crown to the first click.
 2. Each time the hour hand makes two full rotations by turning the crown, the date is adjusted one day.

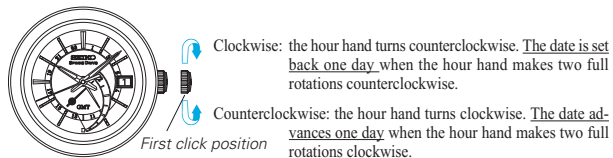


- * The date can be adjusted either by advancing it or by setting it back. Choose whichever requires fewer rotations.
- * Turn the crown gently.
- * To adjust the date without changing the time, turn the hour hand in two-full rotation increments.

* When adjusting the hour hand, the other hands may move slightly. However, this is not a malfunction.

3. After completing the date setting, check the position of the hour hand once again and push the crown back in.

● How to adjust the time difference

- While staying in a place in a different time zone area from where you live, you can conveniently set the watch to indicate the local time in the place where you are staying without stopping the watch.
 - The time difference adjustment function is interrelated with the date display. If the time difference is correctly adjusted, the watch displays the correct date of the place where you are staying.
1. Pull out the crown to the first click.
 2. Turn the crown to set the hour hand to indicate the time of the place where you are staying. The hour hand is independently set to the current hour.

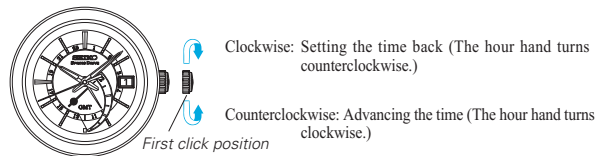

* Turn the crown slowly, checking that the hour hand moves in one-hour increments.

- * Refer to "● Time difference table" for time differences from GMT (UTC).
- * When adjusting the time difference, make sure that AM/PM and the date are correctly set.
- * When adjusting the hour hand, the other hands may move slightly. However, this is not a malfunction.
- * When turning the crown clockwise to set the hour hand to indicate any time between 9:00 P.M. and midnight, keep turning until the hour hand points 8:00 P.M., and then advance it to the desired time.

3. After completing the time difference adjustment, check the position of the hour hand once again and push the crown back in.

● Time difference table

- * Refer to the table below for time differences from GMT (UTC) in major cities in the world.

Major cities in respective time zones	Time difference with GMT (UTC)
Midway Islands	-11 hours
Honolulu	-10 hours
Anchorage ★	-9 hours
Los Angeles ★, San Francisco ★	-8 hours
Denver ★, Edmonton ★	-7 hours
Chicago ★, Mexico City ★	-6 hours
New York ★, Washington ★, Montreal ★	-5 hours
Caracas, Santiago ★	-4 hours
Rio de Janeiro ★	-3 hours
Azores ★	-1 hour
London ★, Casablanca	0 hour

Paris ★, Rome★, Amsterdam★	+1 hour
Cairo ★, Athens★, Istanbul★	+2 hours
Moscow ★, Mecca, Nairobi	+3 hours
Dubai	+4 hours
Karachi, Tashkent★	+5 hours
Dacca	+6 hours
Bangkok, Jakarta	+7 hours
Hong Kong, Manila, Beijing, Singapore	+8 hours
Tokyo, Seoul, Pyongyang	+9 hours
Sydney ★, Guam, Khabarovsk★	+10 hours
Nouméa, Solomon Islands	+11 hours
Wellington ★, Fiji islands, Auckland★	+12 hours


* Cities marked with "★" use daylight saving time.

* The time differences and use of daylight saving time in each city are subject to change according to the governments of the respective countries or regions.


● How to set the time and moon phase (for Cal. 5R67)

● How to set the time

- When setting the time, ensure that the watch is working: the main spring is sufficiently wound.



1. Pull out the crown to the second click when the second hand is at the 12 o'clock (0 second) position. The second hand will stop on the spot.



2. Turn the crown counterclockwise (the 6 o'clock direction) to set the minute hand slightly behind the time you wish to set, and then slowly advance it to the desired time.


3. Push the crown back in simultaneously with a time signal. The second hand will start to move immediately.

Tips for more accurate time setting

- Keep in mind the following points in order to set the time more accurately.
- 1. Before setting the time, wind the mainspring sufficiently until the power reserve indicator shows the fully-wound state.
- 2. When starting to use a watch after it stops, wind the mainspring sufficiently and wait approximately 30 seconds after the second hand starts to move, then pull the crown out to the second click.
- 3. Do not stop the second hand movement for 30 minutes or longer while the crown is at the second click position. If the stoppage of the second hand movement exceeds 30 minutes, push the crown back in to restart the second hand, wait at least 30 seconds, and then carry out the time setting once again.

● How to set the moon phase

- The moon phase represents the period from the time when the last new moon occurred to noon of the current day in day increments.
- The period between new moons is called a “synodic month,” and its average length is approximately 29.5 days.



1. Pull out the crown to the first click.
2. Slowly turn the crown counterclockwise (the 6 o'clock position) to advance the moon phase by one. First, set the moon phase to either “0” (new moon) or “15” (full moon), then advance it one by one until it shows the correct moon phase.







- * Round off the number of moon phases to the nearest whole number. (Example; 7.8 → 8, 24.2 → 24)
- * Refer to the weather report of your local newspaper for current moon phase information.
- * While the hour hand of the watch is between the 9 o'clock and 2 o'clock positions, do not adjust the moon phase. If it is necessary to set the moon phase during this time, pull out the crown to the second click, turn the crown counterclockwise (the 6 o'clock position) to temporarily advance the time past 2 o'clock, push the crown back to the first click, and then adjust the moon phase.

3. Push the crown back in upon completion of moon phase setting.

Moon phase 0 (new moon)	Moon phase 7	Moon phase 15 (full moon)	Moon phase 22

HOW TO READ THE POWER RESERVE INDICATOR

- The power reserve indicator lets you know the winding state of the mainspring.
- Before removing the watch from your wrist, observe the power reserve indicator to check if the watch has enough power stored to keep running until the next time you wear it. If necessary, wind the mainspring. (To prevent the watch from stopping, wind the mainspring to store the excess power that will allow the watch to run for extra time.)

Power Reserve Indicator	5R66			
	5R67			
Winding state of the mainspring		Fully wound	Half wound	Unwound
Number of hours the watch can run		Approximately 72 hours (3 days)	Approximately 36 hours (1.5 days)	The watch either stops or is running down.

- When the mainspring is fully wound, the crown can be turned further, or the mainspring may wind without damaging the mainspring itself. The mainspring of the watch employs a slipping mechanism, an automatic watch specific mechanism, to prevent the mainspring from overwinding.

● Remarks on the automatic mechanism of the mainspring

The mainspring of the watch becomes fully wound when it is worn for twelve hours for three to five consecutive days. However, the winding state of the mainspring may vary depending on actual use conditions, such as the number of hours you wear the watch or the extent of your movement while wearing it. It is recommended that you observe the power reserve indicator to check the level of remaining power of your watch.

- In a case where you wear the watch for a short period of time each day, observe the power reserve indicator to check the level of the remaining power. If necessary, manually wind the mainspring.

TO PRESERVE THE QUALITY OF YOUR WATCH



CAUTION

● CARE OF YOUR WATCH

- In normal circumstances, your watch will not require any special care, and will deliver many years of trouble-free use. To ensure its longevity and to avoid any problem of skin irritations, please wipe off moisture, sweat or soil with a soft dry cloth as soon as possible.

<Leather strap>

- Gently blot off any moisture using a soft dry cloth. Do not rub the leather, as this may cause abrasions or discoloration.

<Metal bracelet>

- Clean the metal bracelet with a soft toothbrush dipped in clean or soapy water. Be careful not to get water on the case.



CAUTION

● RASH AND ALLERGIC REACTION

- Adjust the band to allow a little clearance with your wrist to ensure proper airflow.
- For a small number of people, the close contact of the watch with the skin may cause skin irritation or an allergic reaction.
- Possible causes of dermatitis
 - Allergic reaction to metals or leathers
 - Rust, contamination or perspiration accumulated on the watch case or band.
- If you should develop any allergic symptoms or skin irritation, immediately stop wearing the watch and seek medical attention.

● WATER RESISTANCE



● Non-water resistance

If "WATER RESISTANT" is not inscribed on the case back, your watch is not water resistant, and care should be taken not to get it wet as water may damage the movement. If the watch becomes wet, we suggest that you have it checked by the retailer from whom the watch was purchased or any member of the SEIKO SPRING DRIVE worldwide service network.



● **Water resistance (3 bar)**

If "WATER RESISTANT" is inscribed on the case back, your watch is designed and manufactured to withstand up to 3 bar, such as accidental contact with splashes of water or rain, but it is not designed for wearing while swimming or diving.



● **Water resistance (5 bar)***

If "WATER RESISTANT 5 BAR" is inscribed on the case back, your watch is designed and manufactured to withstand up to 5 bar and is suitable for wearing while swimming, yachting and taking a shower.



● **Water resistance (10 bar/15 bar/20 bar)***

If "WATER RESISTANT 10 BAR", "WATER RESISTANT 15 BAR" or "WATER RESISTANT 20 BAR" is inscribed on the case back, your watch is designed and manufactured to withstand up to 10 bar/15 bar/20 bar, respectively, and is suitable for wearing while taking a bath or shallow diving, but not for scuba diving. We recommend that you wear a SEIKO Diver's watch while scuba diving.

- * Before using a water resistant 5, 10, 15 or 20 bar watch in water, make sure the crown is pushed in completely.
Do not operate the crown when the watch is wet or in water. If used in sea water, rinse the watch in fresh water and dry it completely.

- * When taking a shower while wearing a water resistant 5 bar watch, or taking a bath while wearing a water resistant 10, 15 or 20 bar watch, make sure to observe the following:

- Do not operate the crown when the watch is wet with soapy water or shampoo.
- If the watch is left in warm water, a slight time loss or gain may be caused. This condition, however, will be corrected when the watch returns to normal temperature.

NOTE:

Pressure in bar is a test pressure and should not be considered as corresponding to an actual diving depth since swimming movements tend to increase the pressure at a given depth. Care should also be taken when wearing and diving into water.

PRECAUTIONS ON WEARING YOUR WATCH

- There is a possibility of injury caused by wearing the watch on your wrist, especially if you fall down or bump into other people or objects.
- Exercise care when you hold an infant or small child while wearing the watch on your wrist, as the infant or child may be injured or develop an allergic reaction caused by direct contact with the watch.
- Avoid undue shocks such as dropping or scratching against hard surfaces or playing active sports, which may cause temporary malfunctions.

PLACES TO KEEP YOUR WATCH

- Avoid storing the watch in temperatures outside the normal range (below -10°C or above $+60^{\circ}\text{C}$), as the electronic components may cease to function normally or the watch may stop.
- Do not leave the watch in a place where it will be subjected to strong magnetism (for example, near television sets, loudspeakers or magnetic necklaces).
- Do not leave the watch where there is strong vibration.
- Do not leave the watch in dusty places.
- Do not expose the watch to chemical substances or gases.
(Ex.: Organic solvents such as benzine and thinner, gasoline, nail polish, cosmetic sprays, detergents, adhesives, mercury, and iodine antiseptic solution.)
- Do not leave the watch in close contact with hot spring water.

PERIODIC CHECKS

- Inspection and overhaul of the watch will be performed by SEIKO. When you take your watch to the retailer from whom the watch was purchased, make sure that the watch will be serviced by SEIKO.
- We suggest that you have your watch checked once every three or four years to inspect whether the watch needs lubrication, or if there are any oil contaminated parts that need to be replaced to prevent malfunction. If the gasket is worn out, perspiration or water may penetrate the case, which damages the water resistant quality.
- Specify use of SEIKO genuine parts if parts replacement is required.
- Make sure to have the gasket and pushpin replaced when the watch is checked.

TROUBLESHOOTING

Trouble	Possible causes
The watch stops operating.	The power supplied by the mainspring has been consumed.
Even though you wear the watch every day, the power reserve indicator does not move up.	The watch is worn on your wrist only for a short period of time, or the amount of arm movement is small.
The watch temporarily gains or loses time.	The watch has been left or worn in extremely high or low temperatures.
	The watch has been left close to an object with a strong magnetic field.
	You drop the watch, hit it against a hard surface, or wear it while playing active sports. The watch is exposed to strong vibrations.
The inner surface of the glass is clouded.	Moisture has entered the watch because the gasket has deteriorated.
The watch stops even though the power reserve indicator is not showing "0."	The watch has been left at a temperature below 0°C.
Right after starting the watch, it seems that the second hand moves more quickly than usual when setting the time.	When starting the watch, it takes a little time before the adjustment function starts working (this is not a malfunction).
The date changes at 12 o'clock noon.	AM/PM is not properly set.

Solutions
Refer to "HOW TO USE" section of this booklet to wind the mainspring and reset the time. While you are wearing the watch or when you take it off, check the remaining power shown by the power reserve indicator and wind the mainspring if necessary.
Wear the watch for an extended period of time, or when taking off the watch, turn the crown to wind the mainspring if the remaining power shown by the power reserve indicator is not sufficient for the next use.
Return the watch to a normal temperature so that it works accurately as usual, and then reset the time. The watch has been adjusted so that it works accurately when it is worn on your wrist under a normal temperature range between 5 °C and 35 °C.
Correct this condition by moving and keeping the watch away from the magnetic source. If this action does not correct the condition, contact the retailer from whom the watch was purchased.
Reset the time. If the watch does not return to its normal accuracy after resetting the time, contact the retailer from whom the watch was purchased.
Contact the retailer from whom the watch was purchased.
If the watch is left at a temperature below 0 °C, it may stop if the power reserve indicator is showing less than one-sixth of the power reserve. In such a case, turn the crown to wind the mainspring.
It takes several seconds before the adjustment function starts working. Set the time after the second hand moves for approximately 30 seconds to set the time correctly.
Advance the hour hands for 12 hours to correctly set the time and date.

* In the event of any other problem, please contact the retailer from whom the watch was purchased.

SPECIFICATIONS

1	Features	5R66:Hour hand, Minute hand, Second hand, 24-hour hand, Calendar display, Power Reserve Indicator 5R67:Hour hand, Minute hand, Second hand, Moon phase display, Power Reserve Indicator
2	Frequency of crystal oscillator	32,768 Hz (Hz = Hertz ... Cycles per second)
3	Loss/gain	Within ± 15 seconds per month (equivalent to ± 1 second per day) (If the watch is worn on your wrist within normal temperature range between 5 °C and 35 °C.)
4	Operational temperature range	-10 °C ~ +60 °C Under a low-temperature condition (below 0 °C), always keep at least one-sixth of the watch power shown by the power reserve indicator.
5	Driving system	Spring Drive (Automatic type with manual winding function)
6	Hand movement	Glide-motion second hand
7	Continuous operating time	Approx. 72 hours (Approx. 3 days) *If the power reserve indicator shows the power supplied by the mainspring is full before starting the watch.
8	IC (Integrated Circuit)	Oscillator, frequency divider, and spring drive control circuit (C-MOS-IC: 1 piece)
9	Jewels	30 jewels

* The specifications are subject to change without prior notice for product improvements.